

PRODUCTS CATALOGUE



ABOUT ZUYYEE



What we offer

Zuyyee help companies all over the world to achieve a cleaner working environment. Our development department and production facilities are located in Shanghai, China.

Using one of our solutions, you can extract dust, fumes, chips, oil spillages and other harmful substances, right at their source. The result is efficient production.

A healthy working environment results in less absence due to illness, more efficient production, less downtime and better production quality.

You will find us in many different types of industries where a clean working environment is necessary.

Zuyyee supplies a complete range of products and accessories for small and large companies.

Customer Focus

Zuyyee was founded in 2013, with the idea of manufacturing extraction systems to capture dust and other pollutants at the source.

We work closely with our customers, which means that we are always up to date regarding the requirements, regulations and working conditions in different types of workplace.


We supply products that meet these ever-changing needs. But it is not only products that we provide. We also provide the answers to questions.

CONTENTS

| Single Phase Vacuums | | 01 |
|-------------------------------|------------|----|
| Three Phase Vacuums | | 02 |
| Automatic Jet Pulse Vacuums | | 03 |
| CleanroomVacuums | | 04 |
| Air Powered Vacuums | | 05 |
| Oil&Chips Vacuums | | 06 |
| Single Phase Bagging | | 07 |
| Three Phase Bagging | | 80 |
| Two Stage Filtration Bagging | | 09 |
| Automatic Vibration Bagging | | 10 |
| Gasoline Engine Vacuums | | 11 |
| Production Line Vacuums | | 12 |
| Battery Vacuum Cleaner | | 13 |
| Silo Vacuum Cleaner | | 14 |
| Dust Collector | | 15 |
| Fume Extractor | | 16 |
| ACD Vacuum Cleaner | | 17 |
| Single Phase Ex-Proof Vacuums | € > | 18 |
| Three Phase Ex-Proof Vacuums | € > | 19 |
| Immersion Bath Vacuums | € > | 20 |
| Air Powered Ex-Proof Vacuums | € > | 21 |
| Explosion-Proof Dedusting | € > | 22 |
| Accessories | | 23 |

Single Phase Vacuums

Single phase industrial vacuum cleaner, suitable for suction of solids, dust and liquids, equipped with 2 or 3 single-phase motors, with a big collection capacity. The ideal solution for ordinary cleaning needs in any industrial environment.

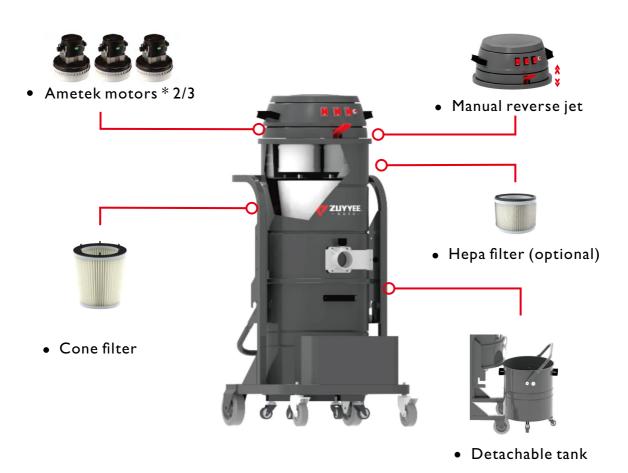





| Model | | PDW-MINI | PDW-LR | PDW-LS | PDW-TN |
|-----------------|--------------|--------------------|--------------------|--------------|------------|
| Voltage | V/50Hz | 220 | 220 | 220 | 220 |
| Power | kW | 2.4 | 3.6 | 3.6 | 3.6 |
| Vacuum | $mm.H_{_2}O$ | 2500 | 2700 | 2700 | 2700 |
| Airflow | M³/h | 360 | 540 | 540 | 540 |
| Filter surface | M^2 | 2+1 | 4+1.5 | 3.5+1.5 | 4+1.5 |
| Filter cleaning | | Manual reverse jet | Manual reverse jet | Manual shake | Manual |
| Capacity | Lt | 45 | 80 | 80 | 80+80 |
| Noise | dB | 72 | 73 | 73 | 73 |
| Dimensions | Cm | 53*58*132 | 65*75*140 | 65*75*140 | 65*117*145 |
| Weight | Kg | 45 | 65 | 65 | 95 |

Three Phase Vacuums

Three phase industrial vacuum cleaner providing correctly matched suction, filtration, sizing and energy collection.

This series is used for mobile cleaning and long-term vacuum cleaning solutions, and can also be used as a type of central vacuum system.

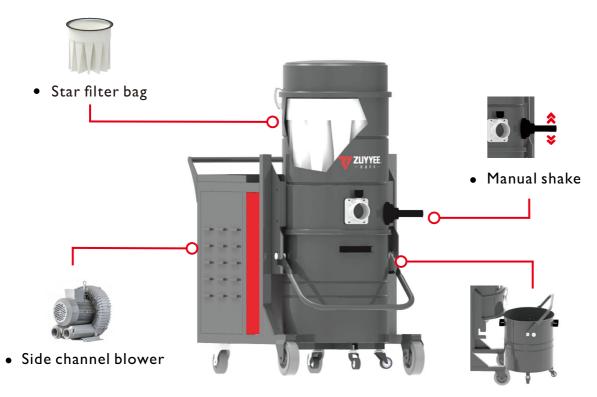






| Model | | ZSM | ZYW | ZAX |
|-----------------|--------|--------------|--------------|--------------|
| Voltage | V/50Hz | 380 | 380 | 380 |
| Power | kW | 2.2/4 | 5.5/7.5 | 11/15 |
| Vacuum | mm.H₂O | 2700/3000 | 3500/3800 | 3800/4000 |
| Airflow | M³/h | 320/400 | 550/680 | 1100/1280 |
| Filter surface | M² | 2.5 | 3.5 | 4 |
| Filter cleaning | | Manual shake | Manual shake | Manual shake |
| Capacity | Lt | 60 | 80 | 100 |
| Noise | dB | 70/72 | 73/74 | 75/76 |
| Dimensions | Cm | 65*115*132 | 65*120*145 | 75*130*158 |
| Weight | Kg | 130/145 | 160/170 | 180/195 |

Automatic Jet Pulse Vacuums

The strong suction is suitable for industrial sites with large amounts of dust. Regular automatic cleaning The filter ensures that it will not clog during use, greatly improving work efficiency and protecting the health of employees.

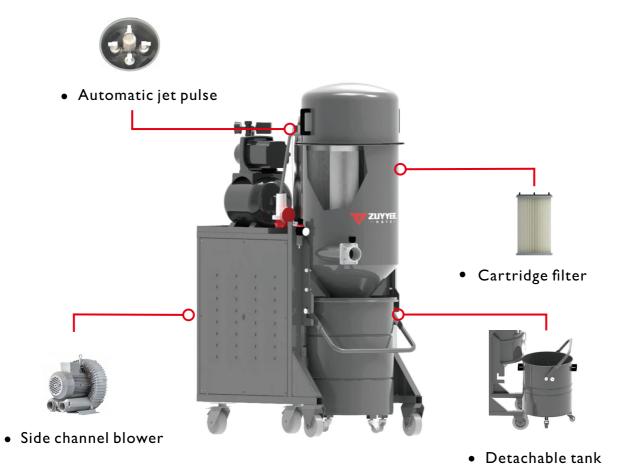








| Model | | ZSM-PN | ZYW-PN | ZAX-PN |
|-----------------|----------------|------------|------------|------------|
| Voltage | V/50Hz | 380 | 380 | 380 |
| Power | kW | 2.2/4 | 5.5/7.5 | 11/15 |
| Vacuum | $mm.H_{2}O$ | 2700/3000 | 3500/3800 | 3800/4000 |
| Airflow | M³/h | 320/400 | 550/680 | 1100/1280 |
| Filter surface | M ² | 4 | 4 | 6 |
| Filter cleaning | | Automatic | Automatic | Automatic |
| Capacity | Lt | 60 | 80 | 100 |
| Noise | dB | 70/72 | 73/74 | 75/76 |
| Dimensions | Cm | 65*115*142 | 65*120*145 | 75*140*185 |
| Weight | Kg | 140/155 | 170/180 | 190/205 |

Cleanroom Vacuums

A series of compact vacuum cleaners designed specifically for clean rooms or environments: Clean room vacuum cleaners can provide up to 4 filtration levels to meet the classification of clean rooms and ensure maximum cleanliness of exhaust air.

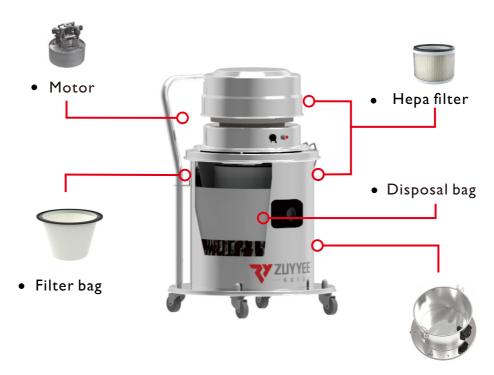

• Stainless steel 304



| Model | | PCN-10R | PCN-20R | PCN-50R |
|-----------------|-----------|----------|----------|-----------|
| Voltage | V/50Hz | 220 | 220 | 220 |
| Power | kW | 1.2 | 1.2 | 1.2 |
| Vacuum | $mm.H_2O$ | 2300 | 2300 | 2300 |
| Airflow | M³/h | 180 | 180 | 180 |
| Filter surface | M^2 | 1.5 | 1.5 | 2 |
| Filter cleaning | | | | 1 |
| Capacity | Lt | 20 | 40 | 60 |
| Noise | dB | 70 | 70 | 70 |
| Dimensions | Cm | 50*50*58 | 52*52*82 | 55*62*130 |
| Weight | Kg | 20 | 25 | 45 |

Air Powered Vacuums

The air generates suction through a Venturi device, which is an ideal solution for extracting dust, solids, and liquids in the absence or lack of power. Due to the lack of power connection, it is safe to use and completely maintenance free.










| Model | | PCN-AIR | PAW-AIR | PDW-AIR |
|-----------------|-----------|----------------|----------------|----------------|
| Power Supply | | Compressed air | Compressed air | Compressed air |
| Air Supply | Lt/min | 1350 | 1350 | 2700 |
| Vacuum | $mm.H_2O$ | 3500 | 3500 | 3800 |
| Airflow | M³/h | 160 | 160 | 320 |
| Filter surface | M^2 | 1.5 | 1.5 | 3.5 |
| Filter cleaning | | | | Manual shake |
| Capacity | Lt | 40 | 80 | 80 |
| Noise | dB | 73 | 73 | 73 |
| Dimensions | Cm | 52*58*80 | 65*70*112 | 65*75*140 |
| Weight | Kg | 30 | 40 | 70 |

Oil&Chips Vacuums

The design of this industrial vacuum cleaner is mainly used to collect a mixture of lubricating oil or coolant and chips during mechanical processing, and after multiple layers of filtration and protection, it is discharged through an oil pump for secondary utilization, improving work efficiency and saving costs.

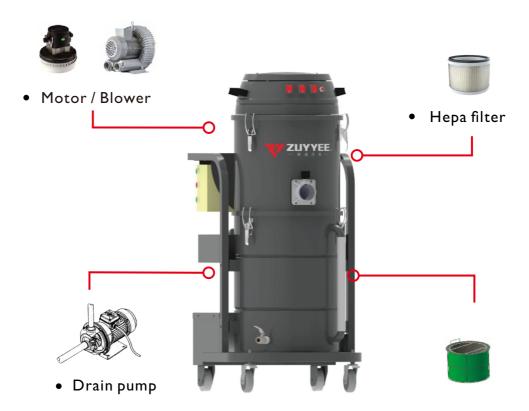

• Grid basket / PPL filter bag



| Model | | PYO | ZOP | ZECO |
|------------------|--------------|-----------|-----------|------------|
| Voltage | V/50Hz | 220 | 220 | 380 |
| Power | kW | 3.6 | 3.6 | 4 |
| Vacuum | $mm.H_{_2}O$ | 2700 | 2700 | 3000 |
| Airflow | M³/h | 540 | 540 | 400 |
| Discharge | M² | Manual | Electric | Electric |
| Chips capacity | Lt | 20 | 20 | 40 |
| Liquids capacity | Lt | 60 | 60 | 250 |
| Noise | dB | 73 | 73 | 72 |
| Dimensions | Cm | 65*75*140 | 65*75*140 | 75*120*160 |
| Weight | Kg | 70 | 85 | 190 |

Single Phase Bagging

The single-phase bagging vacuums has strong suction power and a compact appearance, making it very easy to move. It is equipped with a safe continuous bagging system, allowing it to safely absorb fine dust, even toxic or harmful dust.



| Model | | ZDP-MINI | ZDP-L | ZDD |
|-----------------|-----------|--------------------|--------------------|--------------------|
| Voltage | V/50Hz | 220 | 220 | 220 |
| Power | kW | 2.4 | 3.6 | 3.6 |
| Vacuum | $mm.H_2O$ | 2500 | 2700 | 2700 |
| Airflow | M³/h | 360 | 540 | 540 |
| Filter surface | M² | 2+1 | 4+1.5 | 4+1.5 |
| Filter cleaning | | Manual reverse jet | Manual reverse jet | Manual reverse jet |
| Capacity | Lt | 25 | 25 | 25+40 |
| Noise | dB | 72 | 73 | 73 |
| Dimensions | Cm | 63*63*132 | 65*72*148 | 72*115*155 |
| Weight | Kg | 40 | 65 | 95 |

Three Phase Bagging


The three-phase bagging vacuum cleaner is very suitable for connecting floor surface treatment equipment construction, equipped with a safe continuous bagging system, which can continuously and safely recover and quickly process small and dangerous dust.



| Model | | ZDT | ZDX | ZDS |
|-----------------|-----------|--------------------|------------|--------------------|
| Voltage | V/50Hz | 380 | 380 | 380 |
| Power | kW | 2.2/4 | 5.5/7.5 | 5.5/7.5 |
| Vacuum | $mm.H_2O$ | 2700/3000 | 3500/3800 | 3500/3800 |
| Airflow | M³/h | 320/400 | 550/680 | 550/680 |
| Filter surface | M^2 | 4 | 6 | 4+1.5 |
| Filter cleaning | | Manual reverse jet | Automatic | Manual reverse jet |
| Capacity | Lt | 25 | 25 | 25+40 |
| Noise | dB | 70/72 | 73/74 | 73/74 |
| Dimensions | Cm | 65*115*115/145 | 68*120*158 | 72*120*171/200 |
| Weight | Kg | 85/95 | 130/140 | 200/210 |

Two Stage Filtration Bagging

Two stage filtration bagging is suitable for large amounts of small and harmful dust that needs to be continuously removed and thoroughly cleaned, in order to protect the health of workers, comply with and ensure the quality of their work.

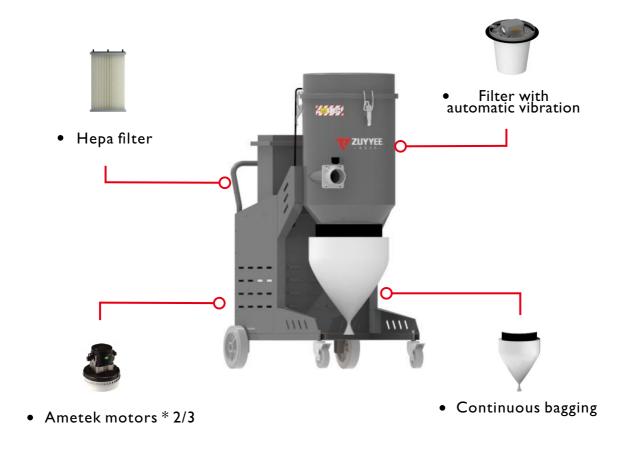






| Model | | ZPM-25/35 | ZPM-A-25/35 |
|-----------------|--------|----------------------|----------------------|
| Voltage | V/50Hz | 220 | 220 |
| Power | kW | 2.4/3.6 | 2.4/3.6 |
| Vacuum | mm.H₂O | 2500/2700 | 2500/2700 |
| Airflow | M³/h | 360/540 | 360/540 |
| Filter surface | M² | 4+2.4/4+3.6 | 4+2.4/4+3.6 |
| Filter cleaning | | Manual reverse jet | Automatic |
| Capacity | Lt | 25 | 25 |
| Noise | dB | 72/73 | 72/73 |
| Dimensions | Cm | 65*85*145/65*110*145 | 65*85*140/65*110*140 |
| Weight | Kg | 75/90 | 85/105 |

Automatic Vibration Bagging

Automatic vibration bagging series is particularly suitable for connecting floor surface treatment equipment. It is equipped with automatic vibration filter cleaning function and continuous bagging system, and can safely and quickly recover and process small and dangerous dust.

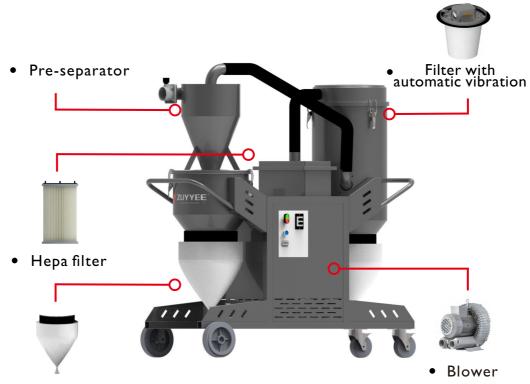








| Model | | ZDT-A-22/40 | ZDS-A |
|-----------------|---------------------|-------------|------------|
| Voltage | V/50Hz | 220/380 | 380 |
| Power | kW | 2.2/4 | 5.5/7.5 |
| Vacuum | mm.H ₂ O | 2700/3000 | 3500/3800 |
| Airflow | M³/h | 320/400 | 550/680 |
| Filter surface | M^2 | 4+3.6 | 4+3.6 |
| Filter cleaning | | Automatic | Automatic |
| Capacity | Lt | 25 | 25+40 |
| Noise | dB | 70/72 | 73/74 |
| Dimensions | Cm | 65*110*145 | 72*150*160 |
| Weight | Kg | 95/110 | 260/280 |

Gasoline Engine Vacuums

Gasoline engine vacuum cleaners can be used in many heavy-duty applications without an external power source, such as street cleaning, road maintenance, factories, and docks. It can also be used in open and well ventilated indoor spaces.

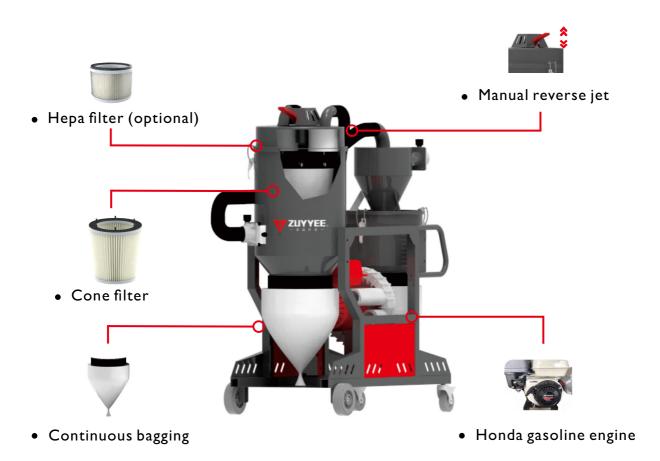








| Model | | ZGB | ZGD | ZGM |
|-----------------|-----------|--------------------|--------------------|--------------|
| Power Supply | Gasoline | HONDA | HONDA | HONDA |
| Power | НР | 5.5 | 5.5 | 5.5 |
| Vacuum | $mm.H_2O$ | 3000 | 3000 | 3000 |
| Airflow | M³/h | 400 | 400 | 400 |
| Filter surface | M^2 | 4+1 | 4+1 | 2.5 |
| Filter cleaning | | Manual reverse jet | Manual reverse jet | Manual shake |
| Capacity | Lt | 25 | 25+40 | 60 |
| Noise | dB | 73 | 73 | 73 |
| Dimensions | Cm | 68*82*145 | 68*120*155 | 70*115*135 |
| Weight | Kg | 85 | 105 | 90 |

Production Line Vacuums

These vacuum cleaners are designed to directly and continuously suction from production lines or mechanical equipment from different industries. Compact, modular, and maintenance free.

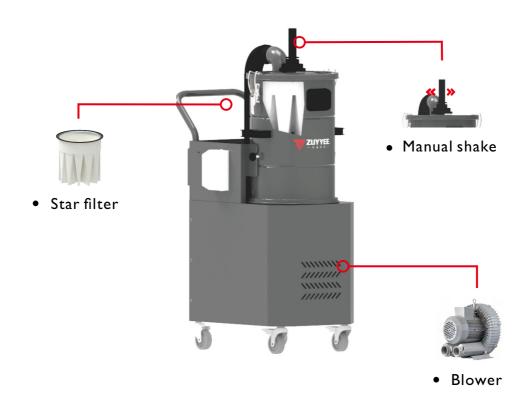








| Model | | ZSW | ZVX | ZTE |
|-----------------|-------------|-----------|--------------|------------|
| Voltage | V/50Hz | 220/380 | 220/380 | 220/380 |
| Power | kW | 1.75/3 | 1.75/3 | 2.2/4 |
| Vacuum | $mm.H_{2}O$ | 2300/2800 | 2300/2800 | 2700/3000 |
| Airflow | M³/h | 280/380 | 280/380 | 320/400 |
| Filter surface | M² | 2 | 1.2 | 2 |
| Filter cleaning | | | Manual shake | |
| Capacity | Lt | 45 | 35 | 60 |
| Noise | dB | 71/72 | 71/72 | 72/73 |
| Dimensions | Cm | 45*85*100 | 70*50*120 | 65*110*135 |
| Weight | Kg | 45/55 | 50/60 | 80/85 |

Battery Vacuum Cleaner

Battery vacuums are suitable for situations where there is no power supply in the workplace or the work range is wide, which makes wiring inconvenient.

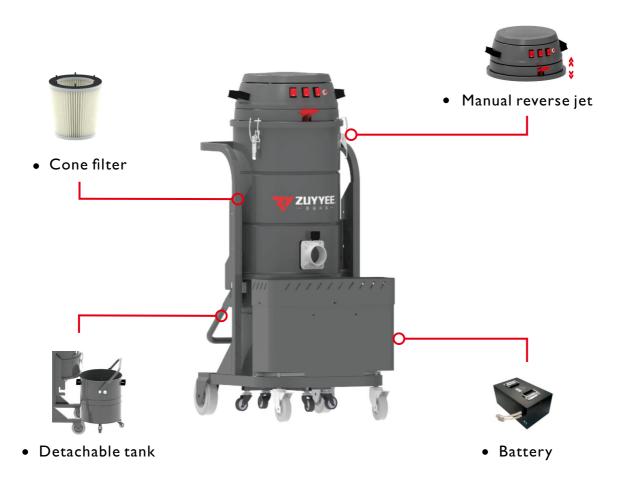






| Model | | ZBE | ZBP |
|-----------------|--------|--------------------|--------------------|
| Voltage | ٧ | 24 | 24 |
| Power | kW | 1.65 | 1.65 |
| Vacuum | mm.H₂O | 2600 | 2600 |
| Airflow | M³/h | 450 | 450 |
| Filter surface | M^2 | 4 | 4 |
| Filter cleaning | | Manual reverse jet | Manual reverse jet |
| Capacity | Lt | 60 | 80 |
| Noise | dB | 73 | 73 |
| Dimensions | Cm | 58*74*128 | 65*75*140 |
| Weight | Kg | 95 | 105 |

Silo Vacuum Cleaner


Industrial silo vacuum cleaners can design cylindrical or cubic shape, a telescopic frame to allow convenient handling, a single-phase or three-phase motor as power, with large capacity to meet all industries that require a large amount of vacuum material And it can be integrated into your production equipment.

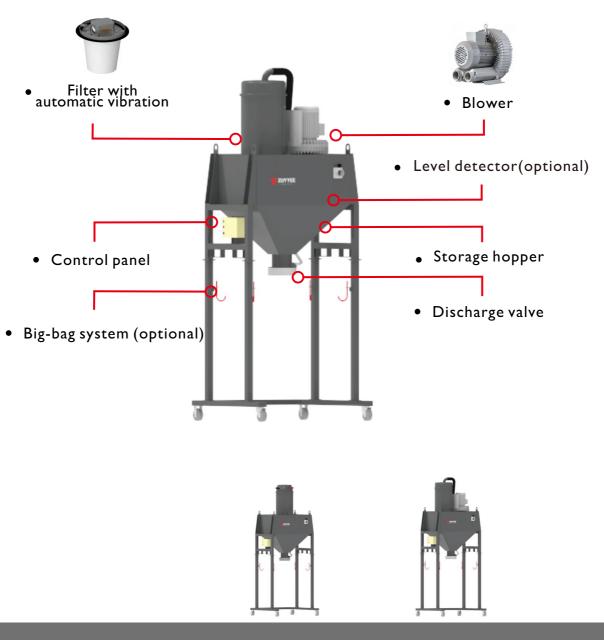

| Model | | TC-S | TC-T |
|-----------------|----------------|-------------|-------------|
| Voltage | ٧ | 220 | 380 |
| Power | kW | 3.6 | 5.5/7.5 |
| Vacuum | mm.H₂O | 2700 | 3500/3800 |
| Airflow | M³/h | 540 | 550/680 |
| Filter surface | M ² | 4 | 4 |
| Filter cleaning | | Automatic | Automatic |
| Capacity | Lt | 600 | 600 |
| Noise | dB | 73 | 75 |
| Dimensions | Cm | 135*130*360 | 135*130*346 |
| Weight | Kg | 150 | 180 |

Dust Collector


The dust collector has a very high air flow rate and can extract dust and small particles from the air. They can be used as fixed extractors connected to process machinery, or as mobile collection units with suction arms installed.

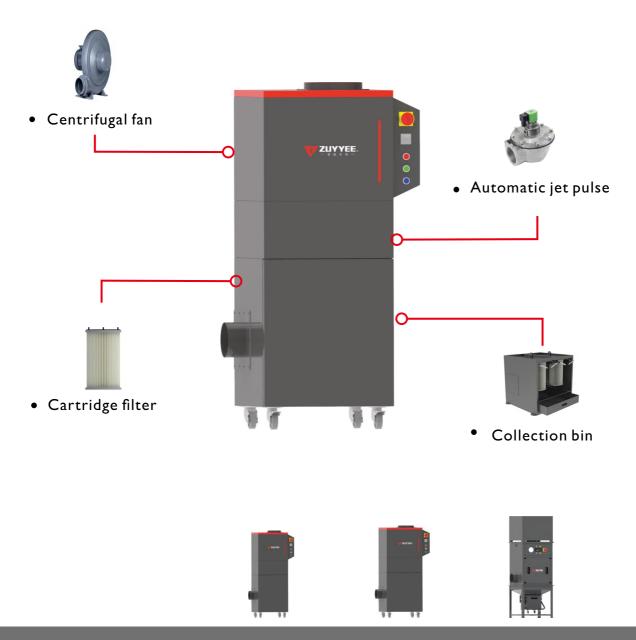

| L | | | | |
|-----------------|--------|-----------|------------|-----------|
| Model | | ZHF | ZHY | ZHD |
| Voltage | V/50Hz | 220/380 | 380 | 380 |
| Power | kW | 1.5/2.2 | 4 | 5.5 |
| Vacuum | Pa | 2000/2300 | 3000 | 3500 |
| Airflow | M³/h | 1500/1800 | 3800 | 4500 |
| Filter surface | M^2 | 8 | 16 | 24 |
| Filter cleaning | | Automatic | Automatic | Automatic |
| Capacity | Lt | 25 | 35 | 50 |
| Noise | dB | 71/72 | 74 | 76 |
| Dimensions | Cm | 87*60*153 | 107*80*190 | 80*90*235 |
| Weight | Kg | 95/105 | 135 | 205 |

Fume Extractor

Fume extractor is used for purifying and recovering smoke and dust generated during welding, polishing, cutting, polishing, and other processes. It can purify a large amount of harmful fine particulate matter suspended in the air. It has the characteristics of high purification efficiency, low noise, flexible use, and small footprint.

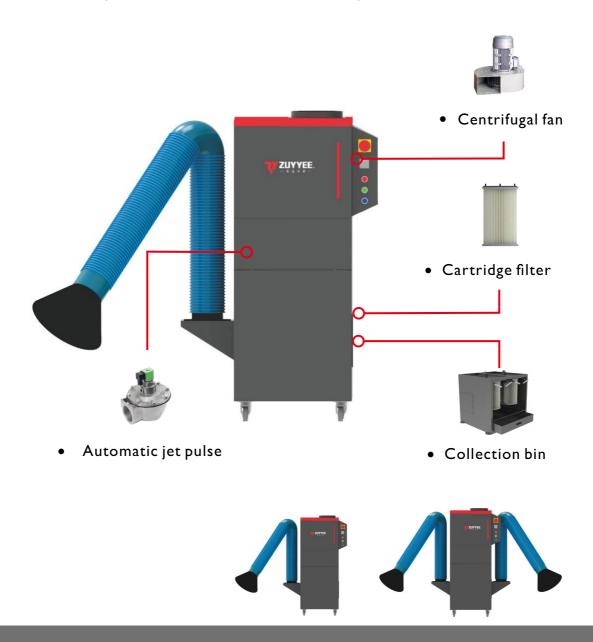

| Model | | DUY | DUY-TW |
|-----------------|--------|-----------|------------|
| Voltage | V/50Hz | 220/380 | 380 |
| Power | kW | 1.5/2.2 | 4 |
| Vacuum | Pa | 2000/2300 | 3000 |
| Airflow | M³/h | 1500/1800 | 3800 |
| Filter surface | M^2 | 8 | 16 |
| Filter cleaning | | Automatic | Automatic |
| Capacity | Lt | 20 | 35 |
| Noise | dB | 72 | 73/74 |
| Dimensions | Cm | 87*60*153 | 107*80*186 |
| Weight | Kg | 95/105 | 135 |

ACD Vacuum Cleaner

ACD industrial vacuum cleaners for combustible dust in Non-classified Areas Industrial vacuum cleaners designed for safe extraction of combustible dust in areas that do not require Atex certification. They are equipped with the M class antistatic filter and the standard HEPA absolute filter for maximum safety.





| Model | | PDW-MINIACD | PDW-LACD | PYW-TACD |
|-----------------|----------------|--------------------|--------------|--------------|
| Voltage | V/50Hz | 220 | 220 | 380 |
| Power | kW | 2.4 | 3.6 | 4 |
| Vacuum | $mm.H_2O$ | 2500 | 2700 | 3000 |
| Airflow | M³/h | 360 | 540 | 400 |
| Filter surface | M ² | 2+1 | 3.5+1.5 | 3.5+1 |
| Filter cleaning | | Manual reverse jet | Manual shake | Manual shake |
| Capacity | Lt | 45 | 80 | 80 |
| Noise | dB | 72 | 73 | 73 |
| Dimensions | Cm | 53*58*132 | 65*75*140 | 65*75*150 |
| Weight | Kg | 45 | 65 | 85 |

Single Phase Ex-ProofVacuums




The single-phase explosion-proof industrial vacuum cleaner is certified to be suitable for flammable and explosive classification areas. It has various safety configurations such as grounding, brushless motor without spark generation, conductive filter, etc. It has a compact structure, simple operation, and convenient movement.

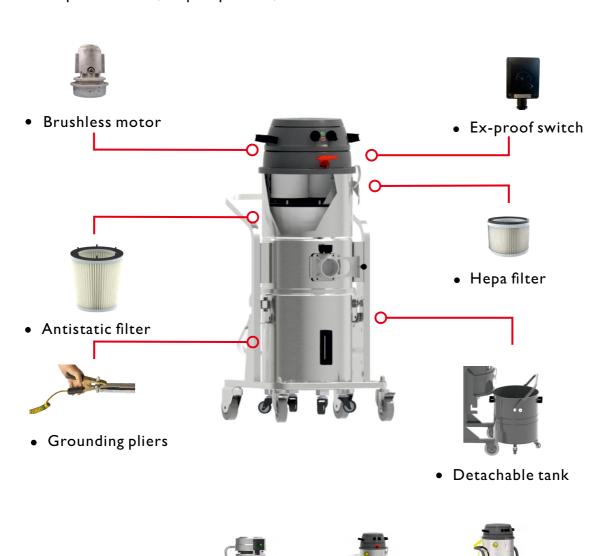

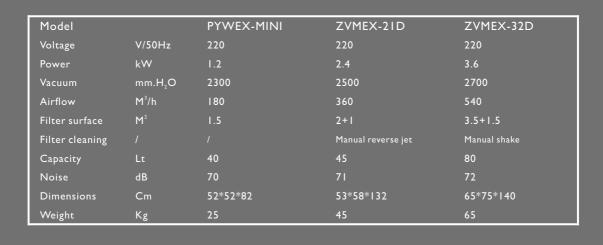

Three Phase Ex-Proof Vacuums

The three-phase explosion-proof industrial vacuum cleaner has been certified to be suitable for almost all flammable and explosive areas, and has safety configurations such as grounding, conductive filters, explosion-proof blowers, and explosion-proof electrical control boxes. Suitable for various applications, there are multiple sizes, powers, functions, and options to choose from.

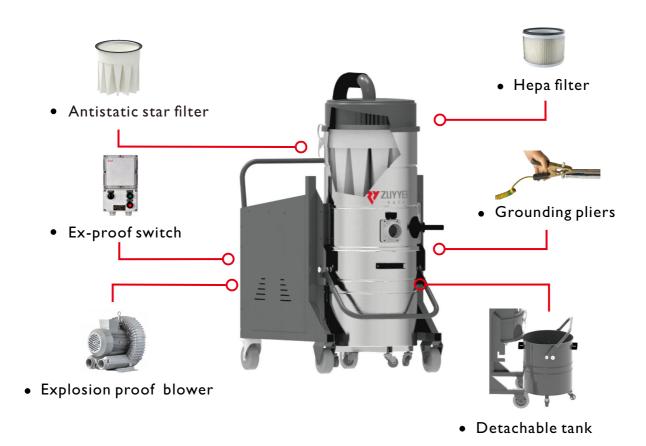







| Model | | PYWEX-T | PYWEX | ZYWEX |
|-----------------|--------|--------------|--------------|--------------|
| Voltage | V/50Hz | 220/380 | 380 | 380 |
| Power | kW | 2.2/4 | 2.2/4 | 5.5/7.5 |
| Vacuum | mm.H₂O | 2700/3000 | 2700/3000 | 3500/3800 |
| Airflow | M³/h | 320/400 | 320/400 | 550/680 |
| Filter surface | M^2 | 3.5+1 | 2. 5+ I | 3.5+1.5 |
| Filter cleaning | | Manual shake | Manual shake | Manual shake |
| Capacity | Lt | 80 | 60 | 100 |
| Noise | dB | 70/72 | 70/72 | 73/74 |
| Dimensions | Cm | 65*75*150 | 65*115*135 | 65*120*145 |
| Weight | Kg | 75/85 | 130/145 | 160/170 |

Immersion Bath Vacuums 🕏



The design of the immersion collection system is aimed at collecting and processing various special types of flammable and explosive dust and particles (such as aluminum, magnesium, titanium, etc.). Explosive materials are vacuum and collected in containers, and mixed with inert liquids to make them non explosive.




| Model | | PYWEX-1.2BL | PYWEX-AD1.75 | PYWEX-AD2.2/4 |
|-----------------|-------------|-------------|--------------|---------------|
| Voltage | V/50Hz | 220 | 220 | 380 |
| Power | kW | 1.2 | 1.75 | 2.2/4 |
| Vacuum | $mm.H_{2}O$ | 2300 | 2400 | 2700/3000 |
| Airflow | M³/h | 180 | 300 | 320/400 |
| Filter surface | M² | 2 | 2.5 | 2.5+1 |
| Filter cleaning | | | Manual shake | Manual shake |
| Capacity | Lt | 45 | 60 | 60 |
| Noise | dB | 70 | 71 | 72/73 |
| Dimensions | Cm | 55*62*130 | 65*75*150 | 65*115*135 |
| Weight | Kg | 50 | 80 | 110/130 |

Air Powered Ex-proof Vacuums




Compressed air generates suction through a Venturi device, which can be used to extract dust and particles. Due to the lack of power supply, the filter and body are treated with conductivity, which will not cause static electricity and explosion. It is completely maintenance free, safe and reliable.



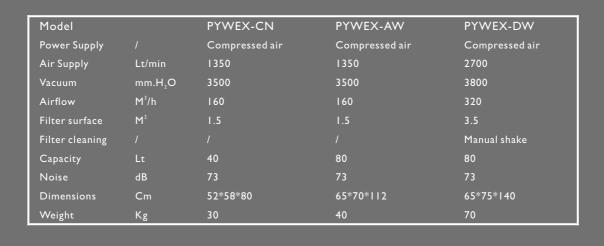

Explosion-Proof Dedusting

Explosion proof industrial dust collectors prevent explosions caused by excessive dust density during industrial production. In addition to preventing explosions, it can also reduce the concentration of dust and protect the environment. It has the characteristics of good dust prevention effect, making it simple and convenient, and reducing the amount of dust.

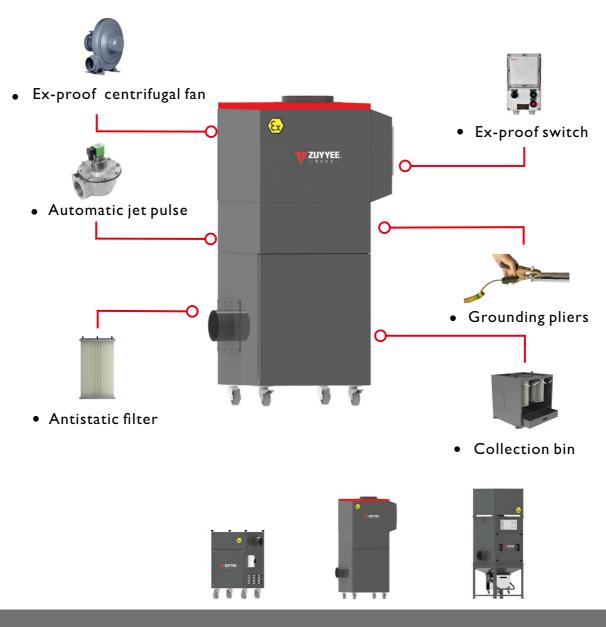


| Model | | DUCEX-12S | DUCEX-22/40S | DUCEX-55S |
|-----------------|--------|-----------|----------------------|-----------|
| Voltage | V/50Hz | 380 | 380 | 380 |
| Power | kW | 1.2 | 2.2/4 | 5.5 |
| Vacuum | Pa | 1800 | 2300/3000 | 3500 |
| Airflow | M³/h | 1200 | 1800/3800 | 4500 |
| Filter surface | M² | 2 | 8/16 | 24 |
| Filter cleaning | | | Automatic | Automatic |
| Capacity | Lt | | 35 | 50 |
| Noise | dB | 68 | 72/74 | 76 |
| Dimensions | Cm | 60*60*90 | 87*60*153/107*80*190 | 80*90*225 |
| Weight | Kg | 40 | 115/145 | 215 |

ACCESSORIES

Zuyyee supplies a wide range of original accessories that allow you to get the most out of your industrial vacuum cleaners. The accessories are available in different materials, to be used in any type of application and industry.

Flexible hoses of different materials for various industries

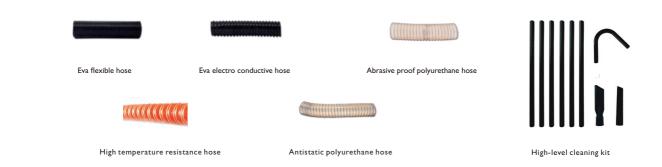

Accessories suitable for various needs



Convenient solutions to help you complete your work











| NOTE: | | |
|-------|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |



Shanghai Zuyyee E&P Co., Ltd Add: Building 1, No.91 Feng fei Road, Feng xian District, Shang hai, China Tel: +86 21 58179176 /58179503

Email:info@zuyyee.com Web:www.zuyyee.com







YouTube



Linkedin



n WhatsApp